

NOV 29 2006 Rec'd PCT/PTO 29 NOV 2006

## (12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property  
Organization  
International Bureau(43) International Publication Date  
24 February 2005 (24.02.2005)

PCT

(10) International Publication Number  
WO 2005/016809 A1

(51) International Patent Classification<sup>7</sup>: B65H 75/24, B62B 1/22

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE, OH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NA, NL, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.

(21) International Application Number: PCT/NZ2004/000187

(22) International Filing Date: 16 August 2004 (16.08.2004)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:  
527666 15 August 2003 (15.08.2003) NZ  
528331 18 September 2003 (18.09.2003) NZ

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, BE, ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PL, PT, RO, SE, SI, SK, TR), OAPI (BF, BJ, CR, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).


(71) Applicant and  
(72) Inventor: HUTCHINSON, Vaughan, John [NZ/NZ]; 175 Surrey Road, RD 8, Tariki, Inglewood, Taranaki (NZ).

(74) Agent: TYRER-HARDING, Denise; Pipers Central, P.O. Box 19-334, Hamilton (NZ).

*[Continued on next page]*

(54) Title: ADJUSTABLE LEAD, CORD, ROPE OR SHEET STORAGE DEVICE

WO 2005/016809 A1

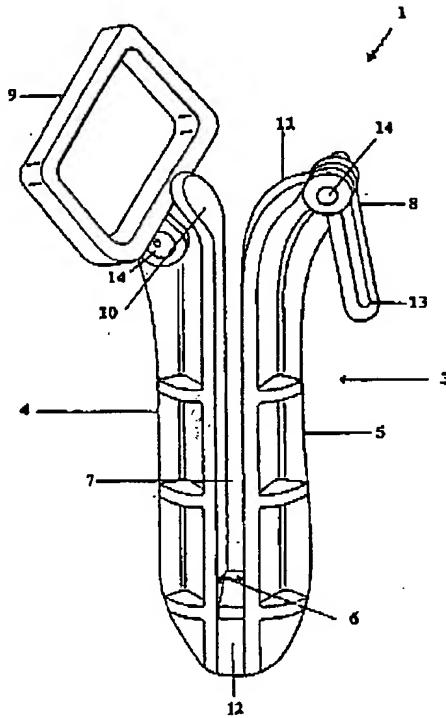

(57) Abstract: A storage device (1) for storing a lead, rope, chain, solid sheet or elongate material, including a body (3) comprising at least one elongate backbone (4) and at least one elongate tine (5) interconnected thereto (12) but separated from by a defined distance to form a channel (6) adapted to receive a lead, rope, chain, solid sheet or elongate material, support means (9) and a latch apparatus (8), the channel (6) being of a dimension to allow only one length of a lead, rope or chain to fit between the backbone (4) and tine (5) at a time (5), preventing tangling of the lead, rope or chain. The storage device (1) may be attached to a wheeled frame or stand for ease of transport.